




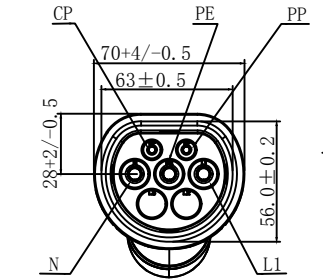

Product NO.		RHT-702-0108		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	xiong	2022/07/01	JIM. KING

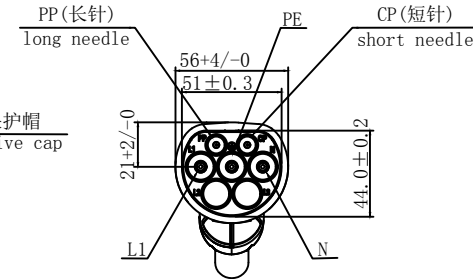

16A车辆端插头5POS  
16A Vehicle end plug 5pos

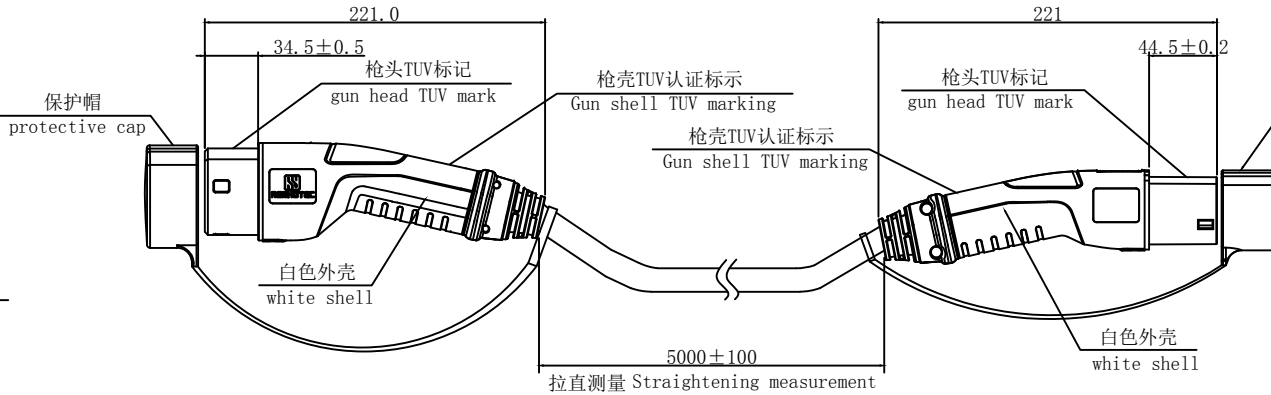

16A桩端插头5POS  
16A pile end plug 5POS

枪壳打标 (左侧):  
Gun shell marking(left side):



枪壳打标 (右侧):  
Gun shell marking(right side):

Renhao Weiye Technology (Wuhan) Co., Ltd  
Name: vehicle connector  
Number: EVS-201  
Specification: 20A 250V AC  
IP class: IP54  
Standard: IEC62196. 2-2016


枪壳打标 (左侧):  
Gun shell marking(left side):



枪壳打标 (右侧):  
Gun shell marking(right side):

Renhao Weiye Technology (Wuhan) Co., Ltd  
Name: plug  
Number: EPS-201  
Specification: 20A 250V AC  
IP class: IP54  
Standard: IEC62196. 2-2016

PP	RI=680Ω	RC=680Ω	PP
PE	2.5mm <sup>2</sup> 黄绿色		PE (Yellow green)
L1	2.5mm <sup>2</sup> 棕色		L1 (Brown)
N	2.5mm <sup>2</sup> 蓝色		N (Blue)
CP	0.5mm <sup>2</sup> 红色		CP (Red)

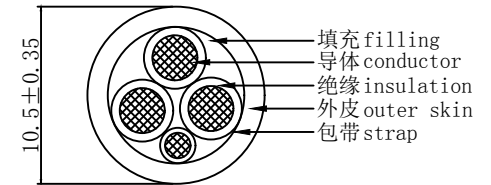

充电枪线缆: 3X2.5mm<sup>2</sup>+1X0.5mm<sup>2</sup> 黑色外皮  
Charging gun cable: 3X2.5mm<sup>2</sup>+1X0.5mm<sup>2</sup> black

技术参数 technical parameter

额定电压 Rated voltage	250V AC
额定电流 Rated current	16A
环境温度 ambient temperature	From -30℃ to +50℃
绝缘电阻 Insulation resistance	L1、N与(and)PE 1000V DC, 测试(test)60S, 绝缘电阻(insulation resistance)>1000Ω
耐电压 Withstand voltage	L1、N与(and)PE 2500V AC, 测试(test)60S, 漏电流(leakage current)<5mA
防护等级 Protection class	IP54
机械寿命 Mechanical life	空载插拔>10000次
插拔力	<100N

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.25mm  
30 - 120mm ± 0.30mm



仁昊伟业 RENHOTECH GROUP



PART DESCRIPTION:  
16A European standard single-phase AC double-head gun

Appr: JIM. KING	P/N: RHT-702-0108				
Check:	Date	Scale	Unit	Type	Page
Draw: XIONG	2022.07.01	Free	MM	Z	1/1