




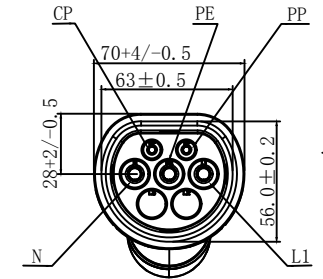

Product NO.		RHT-702-0110		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	xiong	2022/07/01	JIM. KING

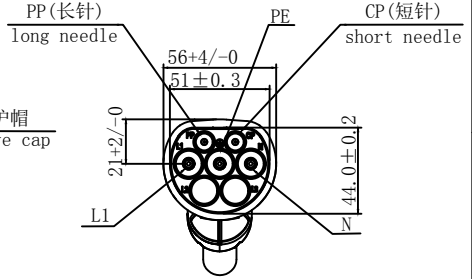

32A车辆端插头5POS  
32A Vehicle end plug 5pos

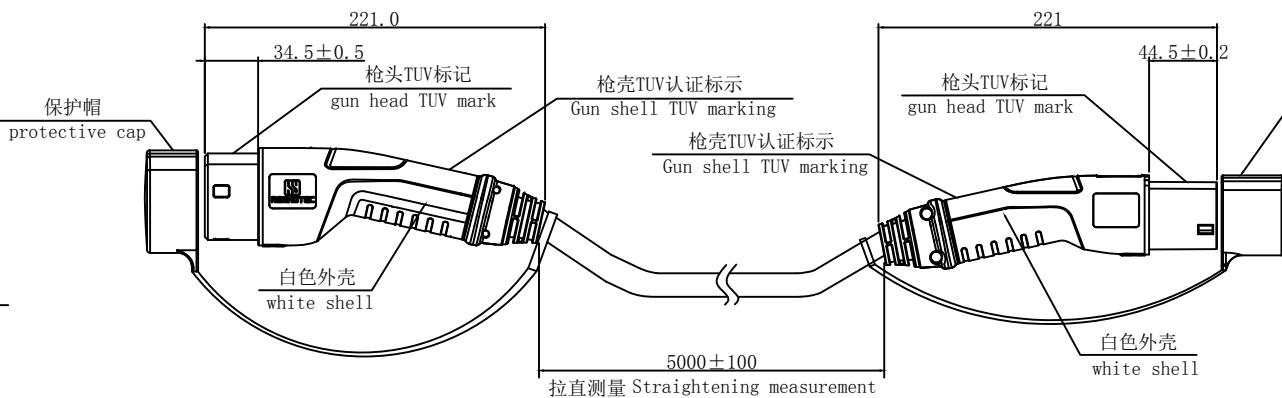

32A桩端插头5POS  
32A pile end plug 5POS

枪壳打标 (左侧):  
Gun shell marking(left side):



枪壳打标 (右侧):  
Gun shell marking(right side):


Renhao Weiye Technology (Wuhan) Co., Ltd  
Name: vehicle connector  
Number: EVS-321  
Specification: 32A 250V AC  
IP class: IP54  
Standard: IEC62196. 2-2016

枪壳打标 (左侧):  
Gun shell marking(left side):



枪壳打标 (右侧):  
Gun shell marking(right side):

Renhao Weiye Technology (Wuhan) Co., Ltd  
Name: plug  
Number: EPS-321  
Specification: 32A 250V AC  
IP class: IP54  
Standard: IEC62196. 2-2016

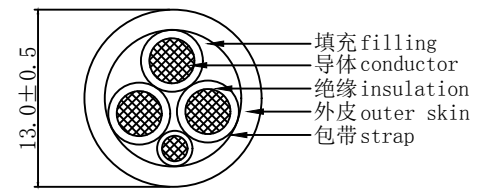

充电枪线缆: 3X6<sup>2</sup>+1X0.5mm<sup>2</sup> 黑色外皮  
Charging gun cable: 3X6mm<sup>2</sup>+1X0.5mm<sup>2</sup> black

PP	R1=220Ω	RC=220Ω	PP
PE	6mm <sup>2</sup> 黄绿色		PE (Yellow green)
L1	6mm <sup>2</sup> 棕色		L1 (Brown)
N	6mm <sup>2</sup> 蓝色		N (Blue)
CP	6mm <sup>2</sup> 红色		CP (Red)

技术参数 technical parameter

额定电压 Rated voltage	250V AC
额定电流 Rated current	32A
环境温度 ambient temperature	From -30℃ to +50℃
绝缘电阻 Insulation resistance	L1、N与(and)PE 1000V DC, 测试(test)60S, 绝缘电阻(insulation resistance)>1000MΩ
耐电压 Withstand voltage	L1、N与(and)PE 2500V AC, 测试(test)60S, 漏电流(leakage current)<5mA
防护等级 Protection class	IP54
机械寿命 Mechanical life	空载插拔>10000次
插拔力	<100N

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>	
	PART DESCRIPTION: 32A European standard single-phase AC double-head gun	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM. KING	P/N: RHT-702-0110
	Check:	Date Scale Unit Type Page
Draw: XIONG	2022.07.01	Free MM Z 1/1